

# HI-REEL LIDS LTD

4 Fuller Road, Harleston, Norfolk IP20 9EA  
Tel+44(0)1379 853 944 Fax+44(0)1379853 058  
Email [sales@hirel.co.uk](mailto:sales@hirel.co.uk) Web [www.hirel.co.uk](http://www.hirel.co.uk)

## FLAT LID


Typical design procedure is as follows:

A&B= 0.005"(0.127) less than O.D. of package  
C= Normally 0.010"(0.254), 0.015"(0.381) or 0.020"(0.508) thick. Thickness based on possible deflection condition due to surface area of package.  
R= 0.003"(0.762) less than nominal outside radius of package.

### NOTES:

All tolerances to be  $\pm 0.005$ "(0.127), unless otherwise indicated.  
Lids can be used on flatpacks or solid sidewalls

All dimensions are in inches(millimeters)

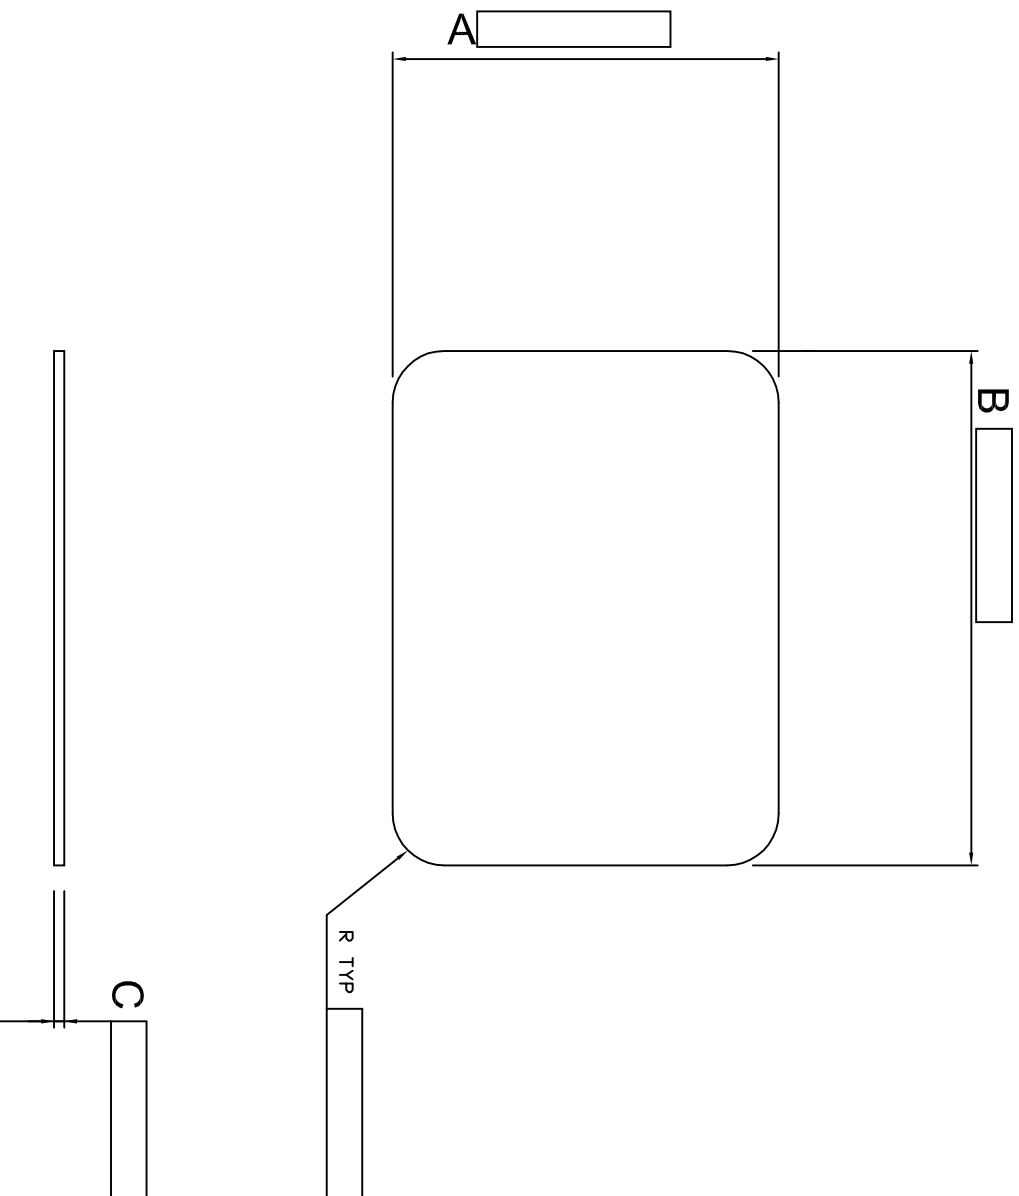

Please fill in the boxes  
and fax back to us on  
+44(0)1379 853058